



This new machine is set to be the dominant machine of its type having been developed for the biscuits and snack foods industry. However this machine is suited to any company looking to seal random case sizes. It automatically adjusts to random sizes, due to the incorporation of a bar code reader while sealing small and large, lightweight and heavy cases without the need of an operator. It is fully automatic and provides secure and accurate taping reaching speeds of up to 30 cases per minute due to the inclusion of high reliability servo drives.

Features of the 744 include:

Servo Drives



While allowing the machine to reach higher speeds - up to 30 cases per minute - the servo drive system permits greater flexibility and control by allowing acceleration and deceleration of the moving heads through the closing and sealing process.

Robust Construction



High quality components housed in a robust chassis ensure minimal servicing and enable 24 hour operation. Designed for the rigours of typical end-of-line packaging environments.

Barcode Reading Scanner



The 744 has barcode scanning technology incorporated, to read the data on the box before it enters the sealing section of the machine so the 744 has time to adjust itself accordingly.

Interchangeable Tapeheads



The 744 uses any machine tape up to 50mm wide, 1000m long and features instantly removable, interchangeable tapeheads, easily threaded, with integral knife guards for rapid tape re-load.

Ease Of Operation



Our hi-resolution colour touch screen HMI allows for rapid set-up, entering of case data and viewing of machine status. Simple mechanical operation and clear access allows for easy cleaning and maintenance.

Low Cost Of Ownership



All Endoline's machines are designed for maximum efficiency and productivity thereby reducing the cost of ownership to a minimum. This case sealer comes at a low capital cost and immediate savings can be seen through reduced labour costs and increased packing speeds.




744

Fully Automated Random Case Sealer

OPTIONS INCLUDE:

- Low tape and no tape sensing
- No scan reject conveyor
- Automatic tapehead retract

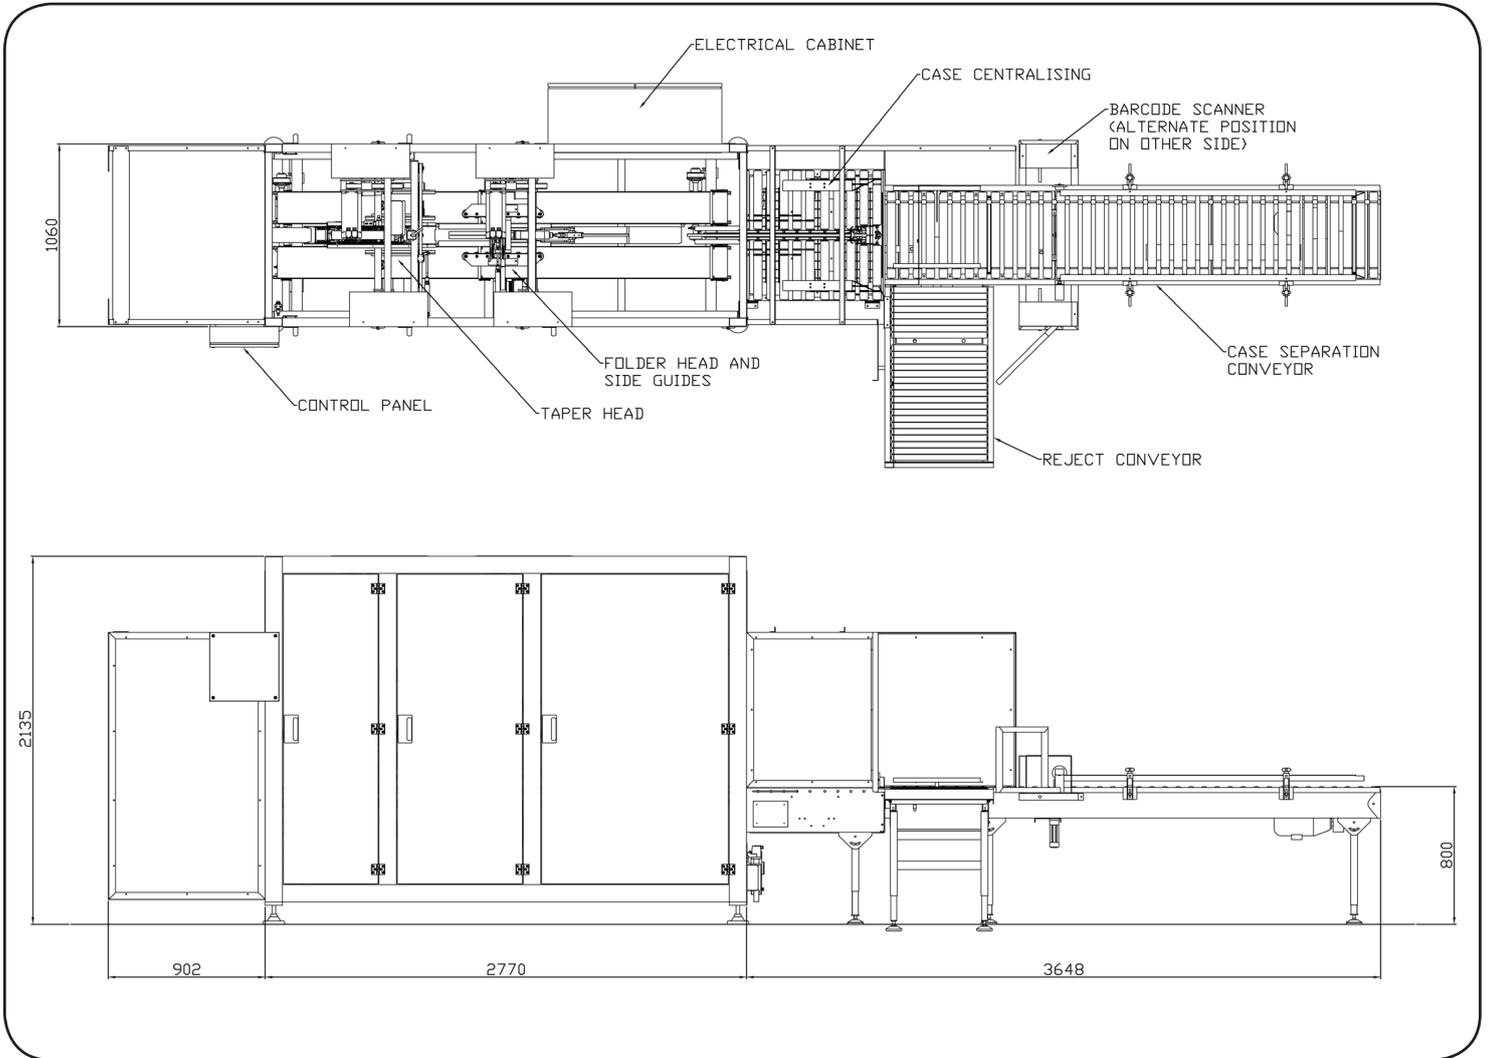

Case Dimensions (mm).

Length	Width	Height
200-600	200-500	160-460

Speed

Up to 30 cases per minute

Tape Size

Standard: up to 50mm wide
Optional: up to 75mm wide

Electrical

63a 3P + N + E 415v 50Hz

Pneumatics

80psi (5.5bar)

Machine Finish

Mild steel, powder coated white (RAL 9010) or stainless steel

© Endoline reserves the right to change specifications without prior notice.



Endoline Machinery Limited
Stratton Business Park, London Road
Biggleswade, Bedfordshire
SG18 8QB
United Kingdom

Telephone: +44 (0) 1767 316422
Facsimile: +44 (0) 1767 318033
E-mail: sales@endoline.co.uk
Website: www.endoline.co.uk